

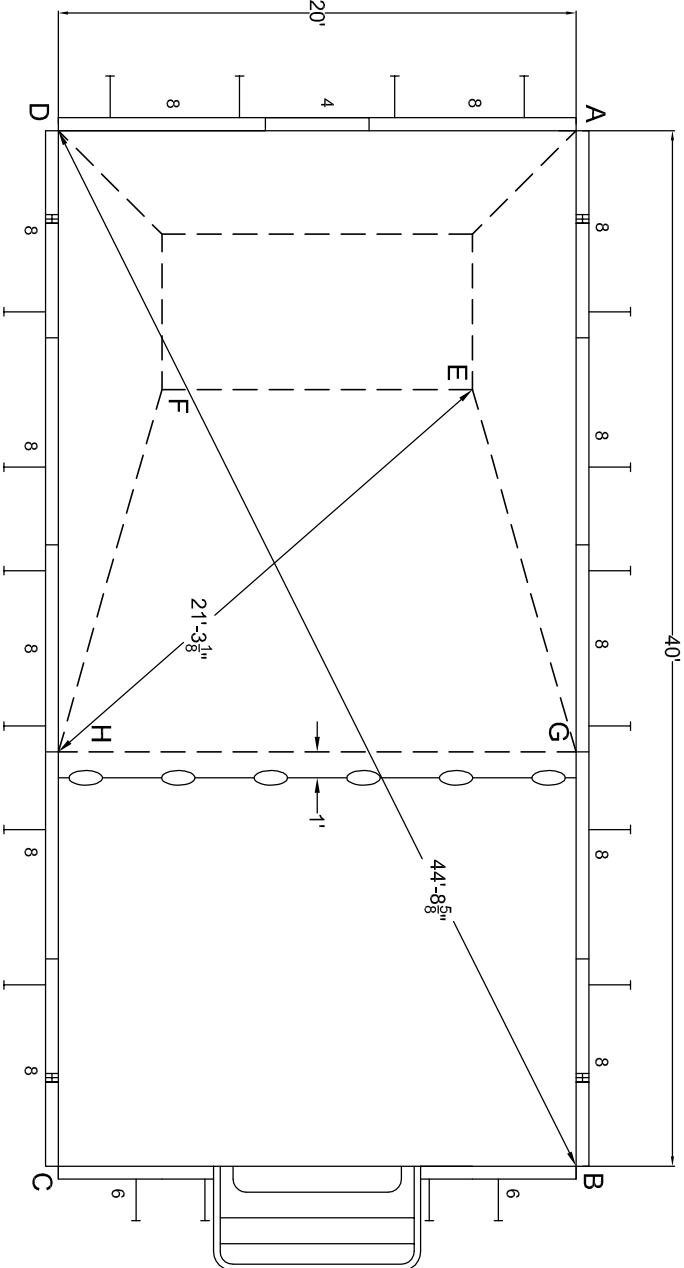




	A	B	C	D	E	F	G	H
A		40°-0"	44°-8 $\frac{1}{2}$ "	20°-0"	10°-9 $\frac{1}{4}$ "	18°-10 $\frac{3}{8}$ "	24°-0"	31°-2 $\frac{7}{8}$ "
	B		20°-0"	44°-8 $\frac{1}{2}$ "	30°-3 $\frac{1}{8}$ "	34°-0"	16°-0"	25°-7 $\frac{3}{8}$ "
		C		40°-0"	34°-0"	30°-3 $\frac{1}{8}$ "	25°-7 $\frac{3}{8}$ "	16°-0"
			D		18°-10 $\frac{3}{8}$ "	10°-9 $\frac{1}{4}$ "	31°-2 $\frac{7}{8}$ "	24°-0"
				E		12°	14°-6 $\frac{3}{4}$ "	21°-3 $\frac{1}{8}$ "
					F		21°-3 $\frac{1}{8}$ "	14°-6 $\frac{3}{4}$ "
						G		20°-0"

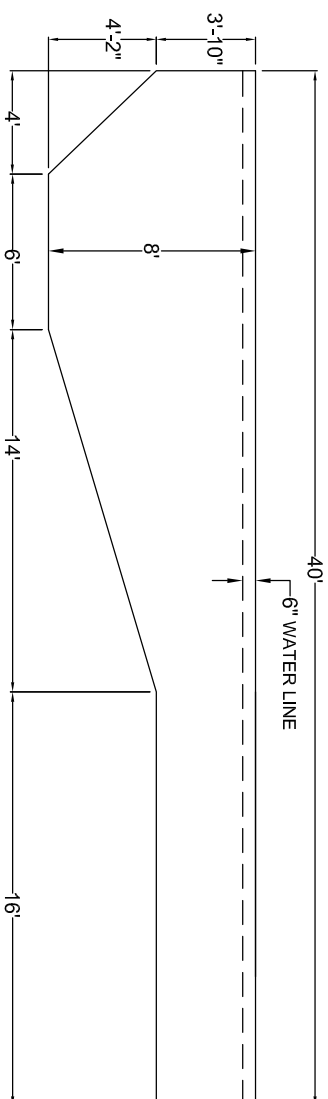

Radiant
PoolsTM

DATE:	01/22/13	PERIMETER:	120'-0"	AREA:	800 sq.ft.	GALLONAGE:	28,550.6 gal.	DEALER
THIS POOL IS DESIGNED TO MEET OR EXCEED INDUSTRY RECOMMENDED SAFETY STANDARDS (ANSI/APSP-5 AMERICAN NATIONAL STANDARDS FOR RESIDENTIAL INGROUND SWIMMING POOLS)				CUSTOMER PURCHASE ORDER #	DRAWN BY:	CUSTOMER		
				POOL NO.	PRC20X40-48S8			PAGE 1 OF 4
					DAVE			